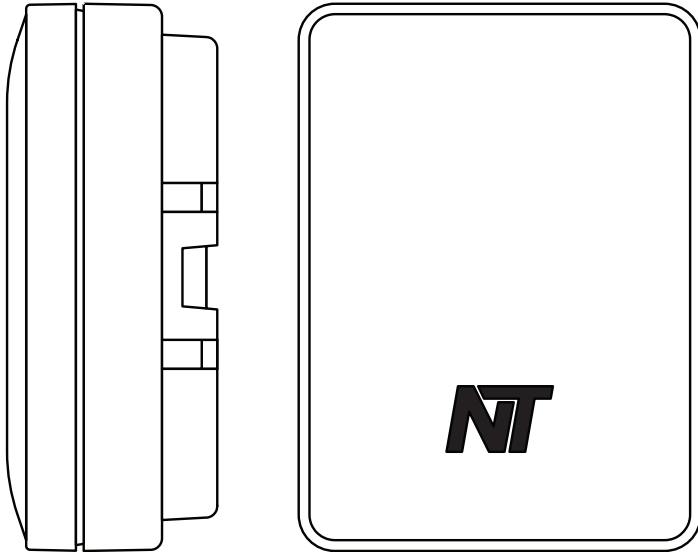![network thermostat logo]

# NT-RS-S

- **10K Remote Sensor**

- **For use with NT-URS (REQUIRED)**

Shown Approximately Actual Size: 2.1"W x 2.85"H x 1"D

## GENERAL DESCRIPTION:

*The power and flexibility of the NetX Advanced Remote Sensor bus is the best in the industry.*

The Network Thermostat NT-RS-S is a 10K thermistor with a curve fit matching the NT-URS electronic sensor. Use the NT-RS-S in retrofit applications where it is impossible or too costly to pull a new NT-URS communications cable. The NT-RS-S will connect to the NT-URS using only 2 conductors.

The NT-RS-S requires the NT-URS. The NT-RS-S cannot be connected directly to a NetX thermostat.

The NT-RS-S mounts directly on an interior wall, and is fixed to the wall using two screws.

## STANDARD FEATURES:

- • Curve Fit to Match the electronics

- • Connects using any 2-conductor Cable

- • Indoor Use Only

- • Measurement Range:
  +28°F to +119°F (-2°C to +48°C)

- • Up to 300ft (90m) of Cabling Can Be Used

- • Dimensions: 2.1"W x 2.85"H x 1"D

NetX Thermostat

RS2    RS+V    RS1

NT-RS-S                NT-URS

**Made in USA**